

A DATA MINING APPROACH COMBINING FUZZY K –MEANS CLUSTERING WITH BAGGING NEURAL NETWORK FOR SHORT-TERM WIND POWER FORECASTING

¹Praveen.K, ²Anguraj siva.J

¹PG Student, ²Assistant Professor

Department of ECE, AVS college of Technology

Abstract

Utilization of wind power as renewable resources of energy has been growing rapidly around the world in the last decades. Wind power generation is fluctuating due to the variation of the wind speed. Therefore, the assessment of the output power of this type of generators is always associated with some amount of uncertainties. Accurate wind power forecasting can effectively support distribution and transmission system operators to improve power network control and management. In this project to deal with the training samples dynamics and improve the forecasting accuracy, a data mining approach consisting of FUZZY *K*-means clustering and bagging neural network (NN) is proposed for short-term

WPF. Based on the similarity among historical days, *K*-means clustering is used to classify the samples into several categories, which contain the information of meteorological conditions and historical power data. In order to overcome the over fitting and instability problems of conventional networks, a baggingbased ensemble approach is integrated into the back propagation NN. To confirm the effectiveness, the proposed data mining approach is examined on real wind generation data traces. The simulation results show that it can obtain better forecasting accuracy than other baseline and existed short-term WPF approaches.

Introduction

Renewable energy in general and wind energy in particular have been growing rapidly in the last decade, becoming a more and more important component of the global energy supply. A catalyst for such growth has been growing energy demand, spiralling fossil fuel prices and an acute necessity to reduce carbon dioxide emissions. From the current perspective all the factors which led to the growth of wind energy in the last decades will continue advancing it in the future. Global energy demand is expected to keep growing, even under the declared intentions to increase energy efficiency (use energy wiser)[1]. Fossil fuel prices are expected (under a relatively optimistic scenario) to stay at least as high in the future [2]. Global warming continues calling for significant reductions in carbon dioxide emissions. In addition, the recent Fukushima disaster has lead to a new wave of serious debate on the safety of nuclear energy, making it somewhat undesirable in the forward-looking policies. All this makes wind energy a very attractive alternative, which is expected to keep growing significantly in the years to come

In recent years, wind speed and wind power prediction approaches are mainly categorized with respect to the time horizon of the application [7]. These methods are mainly divided into three categories: 1) short-term wind prediction estimates the wind data of several minutes to hours ahead. This type of prediction benefits electricity market

clearing, real-time grid operations and regulation, economic dispatch, and operational security in the electricity market [8].

2) Medium-term forecasting focuses on time intervals in the range of several hours to a week. Unit commitment and reserve allocation decisions are made using this type of predictions. 3) Long-term forecasting refers to the prediction of wind velocity in the ranges of one week to a year or more.

Maintenance, expansion planning, and the feasibility studies for the design of wind farms are dependent on this task [9]

Generally, there are four types of wind speed forecasting models proposed in the recent literature: 1) Persistence methods, which assume the wind data at a future time step has

the same values as the current time instance. This assumption is similar to the smoothness assumption known in Machine

Learning, where a function approximation model outputs the same results for two inputs close to each other in the input space. Although this assumption diminishes the future wind speed estimation precision for long time horizons, persistence models are accurate predictors for ultra-short horizons.

2) Physical methods, which are based on lower atmosphere or numerical weather prediction (NWP) that uses weather prediction data such as temperature, pressure, surface roughness, and obstacles. NWPs are generally executed on supercomputers because of their high computational

complexity. The computation burden limits the usefulness of such methods for medium and long-term tasks [10].

3) Statistical methods, which are low-cost and easily applicable techniques to capture the mathematical relationships in the time series data. The prediction accuracy of such methods declines with the increase in the length of the prediction time horizon.

Statistical approaches include autoregressive (AR), autoregressive moving average (ARMA), and autoregressive integrated moving average (ARIMA)

models. In [11], a hybrid ARMA model with wavelet

transformation is introduced for short-term predictions. The research work presented in [12] proposes several ARMA-based approaches for wind speed and wind direction data prediction. An ARIMA with a regression analysis approach is applied to real-life short-term wind forecasting in [13].

Although AI approaches have recently obtained better prediction results compared to statistical models, these methods have several drawbacks: 1) Shallow ANN models have weak generalization capability; thus, they are not able to effectively learn complex patterns from the highly varying wind data. Although wind time series datasets contain large amounts of data, these models cannot learn complex data abstractions. SVM-based approaches, as well as linear models, have the same problem because of the smoothness assumption.

2) Deep neural architectures proposed in the literature, i.e. DBM and SAE, do not consider the sequential characteristics of the wind data. 3) The ANN-based approaches merely

capture wind patterns in the time-space and leverage temporal correlations to learn the temporal features from the time series data. It is shown in the literature that neighboring wind sites have high spatial correlations [27].

In this paper, a data mining approach consisting of the K-means clustering and bagging NN is proposed to predict the short-term wind power of individual wind turbine. The main contributions of this paper are summarized as follows. 1) To mitigate the impact of the diversity of training samples, the K-means clustering is utilized to classify

the original data sets into several categories according to meteorological conditions and historical power. Pearson correlation coefficient is used to calculate the similarity between each category and the forecasting day.

Related and existing system

[Rajesh Kumar](#) et al explores the usage of Markov Chains for forecasting wind speed during a short-term period (day-ahead hourly wind generation forecasts for an individual wind farm). The proposed prediction model depends on one variable factor - wind speed, for a specific wind turbine

[Ning Li](#) et al presents a kind of wind power forecasting method based on empirical mode decomposition (EMD) and random forest (RF). EMD is applied to this method to decompose wind power sequence into several intrinsic mode functions (IMF) and a residual component, and then RF is used to train each component. Finally, the predicting results of each component are summed together to obtain the wind power forecasting values.

[Xiaodan Wang](#) et al present model employs not only the small learning ability and simple calculation of SVM, but also strong global search ability of PSO. The addressed model was tested using real wind speed data. Experimental results show that, the proposed model has the best forecasting accuracy, comparing with classical SVM model and back propagation neural network model.

[Arturas Klementavicius](#) et al deals with the short-term forecasting of wind speed for the Laukžeme wind farm (Lithuania) using time series approach. The ARIMA model was selected and its best structure determined

using the historical wind speed data (4 months) and varying both learning interval (3-5 days) of the model and the factual data averaging time (1-6 hours).

[Jie Shi](#) et al proposes a novel approach using autoregressive model (AR) and Hilbert-Huang Transform (HHT) to improve the accuracy of wind power forecasting. The input data is decomposed into several components, in every of which, the data satisfies the linear characteristic better than the one before transformation. Case study from a wind farm in Texas, U.S.A shows that the proposed approach performs better than the traditional linear forecasting method.

[Natapol Korprasertsak](#) et al investigate three widely-used forecasting models for short-term wind speed prediction from wind measurement data, that is persistence model, autoregressive moving average (ARMA) model, and artificial neural network (ANN). It is found that accuracy of persistence model dramatically decreases as time horizon increases; nevertheless, the persistence model is the simplest algorithm for implementation.

[Ho-Chian Miao](#) et al proposes an adaptive network-based fuzzy inference system (ANFIS) based forecasting method for short-term wind power forecasting. An accurate forecasting method for power generation of the wind energy conversion system (WECS) is urgent needed under the relevant issues associated with the high penetration of wind power in the electricity system

[Zhong Fan](#) et al propose a similar pattern matching technique for data pre-processing. The proposed technique is able to select the most appropriate segments from the available historical data for the forecasting. These segments are used for the training of parameters in the SVM model, which will then be able to provide the desired forecast

Proposed system

Data mining approaches have been widely used for classification and prediction problems. The proposed approach is based on data mining, which consists of the K-means clustering and bagging NN. Fig. 1 shows the WPF model. First, data preprocessing is conducted on the vector space to clean unreasonable data, normalize the training samples, and select the most related variables as the inputs of the NN. Second, data after preprocessing are clustered by the K-means clustering to select the training set which is most similar to the forecasting day. Finally, the wind power is forecasted by the bagging NN, which is able to alleviate the instability and over fitting problems of the BPNN

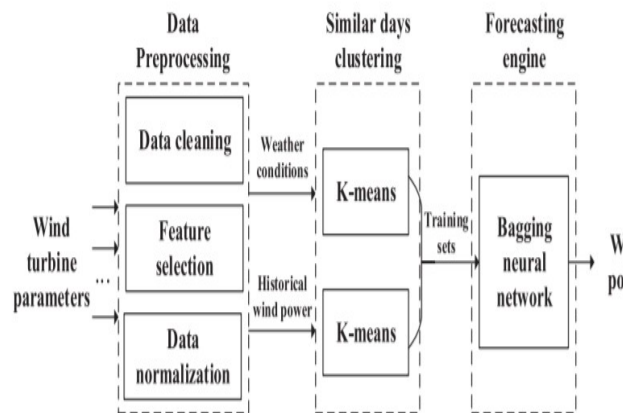


Figure 1 proposed system

A number of wind turbine parameters are collected as the training samples via the sensor unit. However, these samples may contain unreasonable data. Besides, using too many parameters as the training features would increase the computing complexity and obtain undesired results for the reason that some variables are irrelevant or redundant in this model. Selecting features

which are most related to the wind power is able to improve the accuracy. Finally, data normalization has an effect on the convergence rate and accuracy of the training algorithm. Thus, in order to obtain accurate forecasting results, data preprocessing is necessary. 1) Data Cleaning: The original samples may contain data whose values of some characteristics are unreasonable. For example, the values of wind speed and wind power are less than zero. It is obvious that these data are not to fill the vacancy of the deleted data. The mean value method is applied, which makes use of the mean value ahead and back of the deleted data. 2) Feature Selection: In theory, more input variables can carry more discriminating power. But in practice, excessive variables are prone to cause many problems. Therefore, selecting a suitable set of input variables from the raw data has a great impact on the forecasting performance. Relief algorithm is a kind of feature weighting algorithms. The core idea is that the different weights are assigned to the corresponding features according to the correlation, and the feature whose weight is less than the threshold would be removed. The formulation of Relief algorithm is given by [18]. The running time of Relief algorithm increases linearly with the sampling times and original features so that this method has high operating efficiency. In addition, Relief algorithm can achieve the purpose of physical dimensions reduction compared with the principal component analysis (PCA). 3) Data Normalization: The aim of data normalization is to transform the raw data to the same orders of magnitude so that the convergence rate and forecasting accuracy can be improved. The min-max method is applied for normalization, which can be expressed as $x = (x - \min) / (\max -$

min). In this equation, x is the original data, and \max and \min represent the maximum and minimum value of the training set. The result x is mapped to $[0, 1]$.

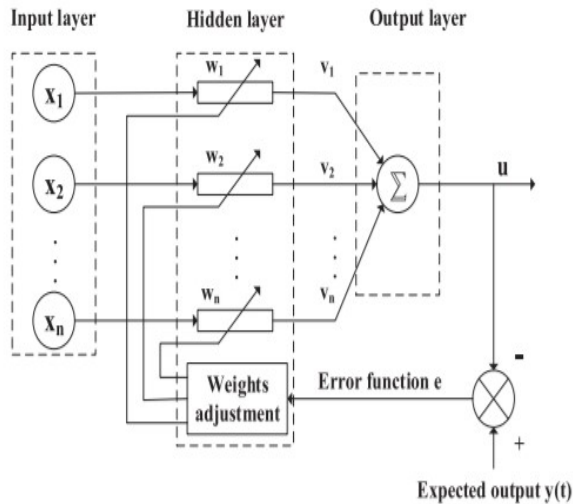


Fig. 2. Model of three-layers BPNN.

Bagging NN NN has been one of the most effective data mining approaches for prediction. NN can deal with nonlinear problems well without establishing complex mathematical model. BPNN as one of the most common NNs is usually used as the forecasting algorithm. The basic BPNN consists of three layers: 1) an input layer; 2) a hidden layer; and 3) an output layer. Fig. 2 shows the principle of the BPNN. The BPNN consists of two processes: 1) forward propagation of data stream and 2) BP of the error signal. In the process of forward propagation, the state of neurons in each layer only affect ones in the next layer. If the expected output could not be obtained in the output layer, the algorithm turns to the process of BP of the error signal. The gradient descent method is conducted on the weights vector space. It is needed to dynamically search for a set of weights vector and minimize the error function. As for the hidden layer, the neural numbers of

this layer is usually $2M + 1$ according to the experience, where M represents the neural numbers of the input layer. However, different neural numbers have an effect on the results of the output layer so that the network is tested when $M = [2, 3, \dots, 10]$ to find the best forecasting result.

SIMULATION RESULTS

In this section, the proposed forecasting approach has been simulated and compared with other approaches. The 10-min data obtained from the SCADA of a wind turbine are collected as research data. The six numbers for an hour are sum to obtain hourly data, which could avoid that 10-min data fluctuated greatly so that the forecasting accuracy could be improved. In order to evaluate the performance, two kinds of error calculation methods: 1) RMSE and 2) MAE are proposed

$$\text{RMSE} = \sqrt{\frac{1}{N} \sum_{i=1}^N (y_i - y'_i)^2}$$

$$\text{MAE} = \frac{1}{N} \sum_{i=1}^N |y_i - y'_i|$$

In the equations described above, y_i is the actual power, y

y'_i is the predictive power, and N is the number of the test data.

CONCLUSION

In this paper, a data mining approach for WPF has been proposed, which consists of the K-means clustering method and bagging NN. The historical data are clustered according to the meteorological conditions

and historical power. Pearson correlation coefficient is used to calculate the distance between the forecasting day and the clusters. The input variables of the NN are selected by Relief algorithm to reduce the complexity and the Bagging algorithm is applied to optimize the stability and accuracy of the BPNN. To demonstrate the effectiveness, the proposed approach has been tested according to the actual data in the practical wind farm. The RMSE and MAE results show that the proposals have significant gains. Although the proposals are not specially designed for the individual wind turbine, the idea of clustering is still important and effective when a large-scale wind farm is built. Particularly, in a wind farm, the location of wind turbines may lie in one direction, then the wind speed of these wind turbines can be classified into one category. With this way, the proposal can be extended and widely used in all real wind farm, which not only increases the forecasting accuracy, but also reduces the computational complexity. To improve the forecasting accuracy, the effective meteorological forecasting should be researched, and the corresponding optimal method for the BPNN should be designed. Besides, the multidimensional clustering problem should be formed and the WPF model for wind farms should be researched.

REFERENCES

- [1]SamidhaMridulVerma ; Vasanth Reddy ; KusumVerma ; Rajesh Kumar,Markov Models Based Short Term Forecasting of Wind Speed for Estimating Day-Ahead Wind Power,, 2018 International Conference on Power, Energy, Control and Transmission Systems
- [2]WeizhouShen ; Na Jiang ; Ning Li, An EMD-RF Based Short-term Wind Power Forecasting Method, 2018 IEEE 7th Data Driven Control and Learning Systems Conference (DDCLS)
- [3]Xiaodan Wang,Forecasting Short-Term Wind Speed Using Support Vector Machine with Particle Swarm Optimization, 2017 International Conference on Sensing, Diagnostics, Prognostics, and Control (SDPC)
- [4] VirginijusRadziukynas , Model optimization for very-short-term wind power forecasting using Hilbert-Huang Transform
- [5] Jie Shi ; Yulei Gong , , XiaoxunZhu,Short-term wind speed forecasting with ARIMA model, 2014 55th International Scientific Conference on Power and Electrical Engineering of Riga Technical University (RTUCON)
- [6] NatapolKorprasertsak , ThananchaiLeephakpreeda,Comparative investigation of short-term wind speed forecasting models for airborne wind turbines, 2017 8th International Conference on Mechanical and Aerospace Engineering (ICMAE)
- [7] Wen-YeouChang ,Short Term Wind Power Generation Forecasting Using Adaptive Network-Based Fuzzy Inference System
- [8] Po-Chuan Chang , Ho-Chian Miao, 2015 International Conference on Computational Intelligence and Communication Networks (CICN)
- [9]FarazNayyar , M MTripathi Short term wind speed and power forecasting in Indian and UK wind power farms, 2016 IEEE 7th Power India International Conference (PIICON)

- [10] Ziming Zhu ; Doudou Zhou ; ZhongFan, Short term forecast of wind power generation based on SVM with pattern matching, 2016 IEEE International Energy Conference (ENERGYCON)
- [11] M. Ahlstrom, L. Jones, R. Zavadil, and W. Grant, "The future of wind forecasting and utility operations," *IEEE Power Energy Mag.*, vol. 3, no. 6, pp. 57–64, Nov./Dec. 2005.
- [2] J. Jung and R. P. Broadwater, "Current status and future advances for wind speed and power forecasting," *Renew. Sustain. Energy Rev.*, vol. 31, pp. 762–777, 2014.
- [3] G. Osrio, J. Matias, and J. Catalo, "Short-term wind power forecasting using adaptive neuro-fuzzy inference system combined with evolutionary particle swarm optimization, wavelet transform and mutual information," *Renew. Energy*, vol. 75, pp. 301–307, 2015.
- [14] N. Chen, Z. Qian, I. Nabney, and X. Meng, "Wind power forecasts using gaussian processes and numerical weather prediction," *IEEE Trans. Power Syst.*, vol. 29, no. 2, pp. 656–665, Mar. 2014.
- [15] C. Wan, Z. Xu, P. Pinson, Z. Y. Dong, and K. P. Wong, "Probabilistic forecasting of wind power generation using extreme learning machine," *IEEE Trans. Power Syst.*, vol. 29, no. 3, pp. 1033–1044, May 2014.
- [16] Q. Hu, P. Su, D. Yu and J. Liu, "Pattern-Based Wind Speed Prediction Based on Generalized Principal Component Analysis", *IEEE Transactions on Sustainable Energy*, vol. 5, no. 3, pp. 866-874, 2014.
- [17] T. G. Barbounis and J. B. Theocharis, "Locally recurrent neural networks for long-term wind speed and power prediction," *Neurocomputing*, vol. 69, no. 4–6, pp. 466–496, 2006.